


LED Luminaires

for Indoor and Outdoor Applications

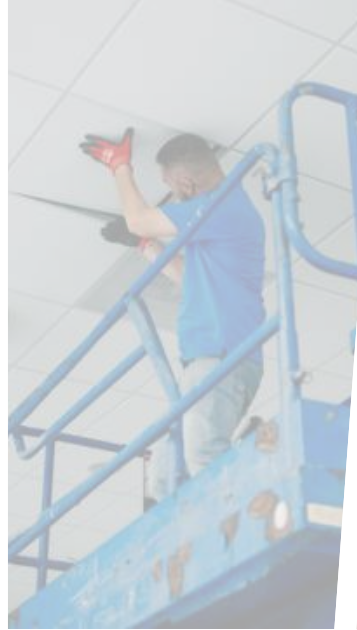

Illuminating Success

National LED, renowned for its impressive projects across Canada, Hawaii, and the US, offers turn-key LED solutions to commercial and industrial clients. We are your go-to for innovative lighting.



NationalLED

**Nationwide Turn-key LED Lighting Solutions.
Direct to customer shipping of LED products.**

NationalLED

At National LED, we excel at handling projects of any size or complexity. We've completed impressive projects across Canada, Hawaii, and the US. Whether multi-location or single-site, count on our professional and experienced team for timely, budget-conscious completion.

CERTIFICATIONS



DLC 5.1 Qualified



DLC 5.1 Premium Qualified



FCC



ETL US



UL



NSF

WARRANTIES




10-Year Warranty

NLED Lighting's 10-year limited warranty, 10-day satisfaction guarantee, and 1-year labor warranty.



5-Year Warranty

NLED Lighting's 5-year limited warranty and 10-day satisfaction guarantee.

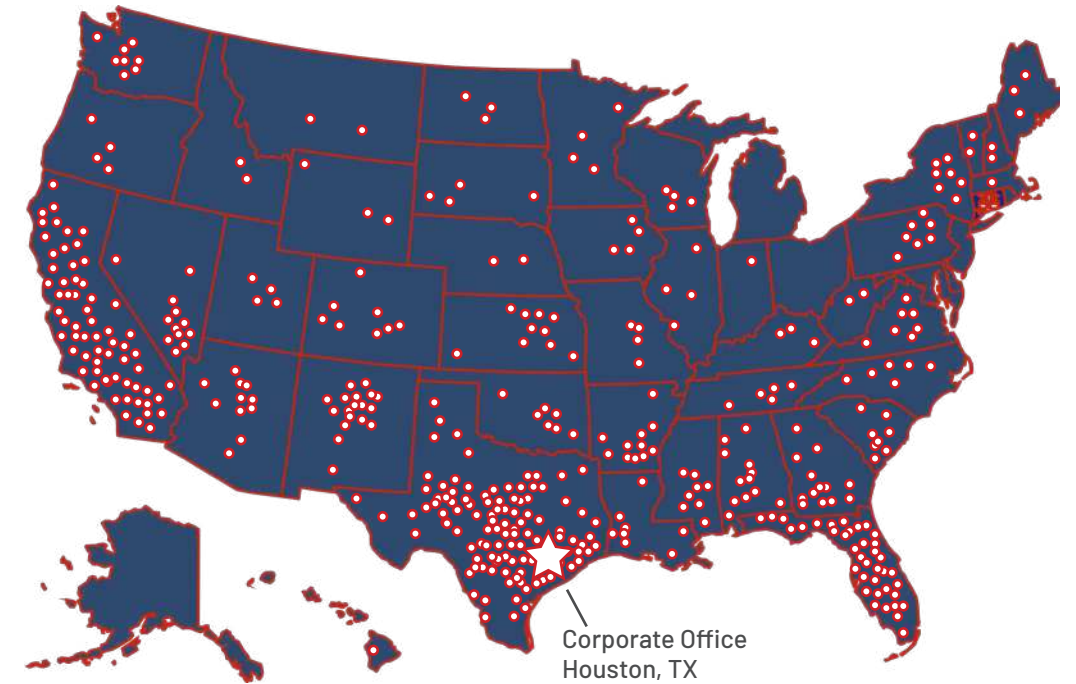

We Sell and Install LED Lighting Across the Nation

We service the entire U.S. and Canada.
Our Corporate office is located in Houston, TX

Over
5,000+
Installations
in the U.S.

USA
Based
Customer
Service

FAST
Ship
Next Day

Clients We Have Served Across the Nation



Mercedes-Benz



UNITED
AIRLINES



Disney



PEPSICO



CIRCUIT OF THE
AMERICAS



VALERO



TABLE OF CONTENTS

★ = New

Interior	01
High Bays	
05	★ LED Selectable High Bay
	★ LED Selectable High Bay
06	★ LED Round High Bay
	★ LED Selectable Extreme High Bay
Controls Ready	
07	LED Bluetooth Troffer
	LED Bluetooth Strip
Panels & Troffers	
08	★ LED Bluetooth Selectable Backlit Panel
	LED Selectable Troffer
Strips & Wraparound	
09	LED Selectable Strip
	LED Selectable Wraparound
10	LED Selectable Strip
	LED Selectable Wraparound
11	LED Selectable Stairwell
Vapor Tight	
12	★ LED Selectable Vapor Tight Strip
	★ LED Selectable Vapor Tight High Bay
Architectural	13
Linear	
15	★ LED Selectable Slim Architectural Linear
Commercial	
18	★ LED Selectable Slot Panel
	LED Selectable Luxe Troffer
19	LED Selectable Luxe Backlit Panel
20	LED T-Grid Linear Light
21	LED Slim Cove Light

Architectural (Continued)	13
Commercial	
22	LED Suspending Semi-Direct
	LED Suspending Vertical Linear
Downlights	23
Gimbal	
25	★ LED Downlight-Gimbal Direct
	★ LED Downlight-Gimbal Regress
26	★ LED Downlight-Gimbal Swivel
	★ LED Downlight-Gimbal Wafer
27	★ LED Downlight-Regress
Commercial	
28	LED Selectable Downlights
	★ LED Selectable Surface Mount Downlight
29	★ LED E26 Plug Base Downlight
	★ LED Selectable Retrofit Downlight
Exterior	31
Area Lights	
33	★ LED Selectable Area Light
	★ LED Selectable Area Light
34	LED Area Light
35	LED Dusk To Dawn
Flood Lights	
36	★ LED Selectable Round Floodlights
	LED Selectable Flood Light
37	LED Flood Light Series
	LED Flat Flood Light Series
38	LED Flat Flood Light Series
String	
38	★ LED High Impact String Lights

Exterior (Continued)	
Wall Packs	
39	★ LED Selectable Cutoff Wall Pack
	LED Selectable Full Cutoff Wall Pack
40	LED Select Selectable Wall Pack
	LED Wall Mount Cylinder
Canopy	
41	★ LED Selectable Canopy
Garage	
41	★ LED Selectable Parking Garage
42	LED Versatile Parking Garage
Roadway	
42	LED Roadway Area Light
Landscape	43
Post Top	
45	LED Selectable Post Top
Bollard	
45	LED Bollard Luminaire
Sports Lighting	47
Sports Light	
49	★ LED Remote Driver Sports Light
50	★ LED RGB Sports Light
51	LED Sports Light Series
52	LED STRIKER Series
Smart Lighting System	55
LED Lighting Controls	
56	LED Lighting Controls

Specialty	57
Hazardous Location	
59	Round High Bay
	Viento Flood Large
	Viento Flood Small
60	Vapor Tight Linear
	Vapor Tight High Bay
Industrial	
61	Guardian
	Vapor Tight Co-Extruded
	Vapor Tight Linear
62	Vapor Tight High Bay
	Vapor Tight Slim Linear

INTERIOR



05 **High Bays**

07 **Controls Ready**

08 **Panels & Troffers**

09 **Strips & Wraparound**





12 **Vapor Tight**



FROM **12,000**
TO
70,000
LUMENS

We've got you covered!

LED SELECTABLE HIGH BAY LINEUP

LED Round High Bay	LED Linear High Bay	LED Round High Bay	LED Compact Linear High Bay	LED Round Industrial High Bay
12,000-28,000 Lm (64-160W)	15,000-31,000 Lm (100-210W)	16,500-36,000 Lm (92-320W)	18,000-38,100 Lm (115-260W)	30,000-70,000 Lm (168-420W)
4000K 5000K	4000K 5000K	4000K 5000K	3500K 4000K 5000K	4000K 5000K
				

L
U
M
E
N

O
U
T
P
U
T

LED Selectable High Bay

Specifications

Switch Selectable
18,000 - 38,100 Lumens

Switch Selectable
3500K - 5000K CCT

Switch Selectable
115 - 260 Watts

Controls Capability

Motion Sensor
Bluetooth Node
Emergency Backup

Dimensions

20.67" x 12.4" x 2.05"



LED Round High Bay

Specifications

Switch Selectable
12,000 - 36,000 Lumens

Switch Selectable
4000K - 5000K CCT

Switch Selectable
64 - 230 Watts

Controls Capability

Motion Sensor
Bluetooth Node
Emergency Backup

Dimensions

10.7" x 7.5"



*Custom color also available.



Pre-installed Emergency Battery with mounting bracket.



LED Selectable High Bay

Specifications

Switch Selectable
14,800 - 31,000 Lumens

Switch Selectable
4000K - 5000K CCT


Switch Selectable
100 - 225 Watts

Controls Capability

Motion Sensor
Bluetooth Node
Emergency Backup

Dimensions

25.6" x 9.84" x 1.75"



LED Selectable Extreme High Bay

Specifications

Switch Selectable
30,000 - 70,000 Lumens

4000K - 5000K CCT

Switch Selectable
168 - 420 Watts

Controls Capability

Motion Sensor
Emergency Backup

Dimensions

24.25" Circumference x 8.73"





LED Bluetooth Troffer

Specifications



App Controlled
5,800 Lumens Max



App Controlled
3000K - 5000K CCT



App Controlled
45 Watts Max

Controls Capability

Motion Sensor

Dimensions

23.7" x 23.7" x 2.1"
47.8" x 23.7" x 2.1"

CONTROL XP



LED Bluetooth Selectable Backlit Panel

Specifications



Switch Selectable
2,750 - 5,500 Lumens



Switch Selectable
3500K - 5000K CCT



Switch Selectable
25 - 50 Watts

Controls Capability

Motion Sensor

Emergency Backup

Dimensions

1' x 4'
2' x 2'
2' x 4'

CONTRACTOR XP



LED Bluetooth Strip

Specifications



App Controlled
9,900 Lumens Max



App Controlled
3000K - 5000K CCT




App Controlled
75 Watts Max

Controls Capability

Motion Sensor

Dimensions

47.3" x 2.8" x 2.5" (4 ft)
94.2" x 2.8" x 2.5" (8 ft)

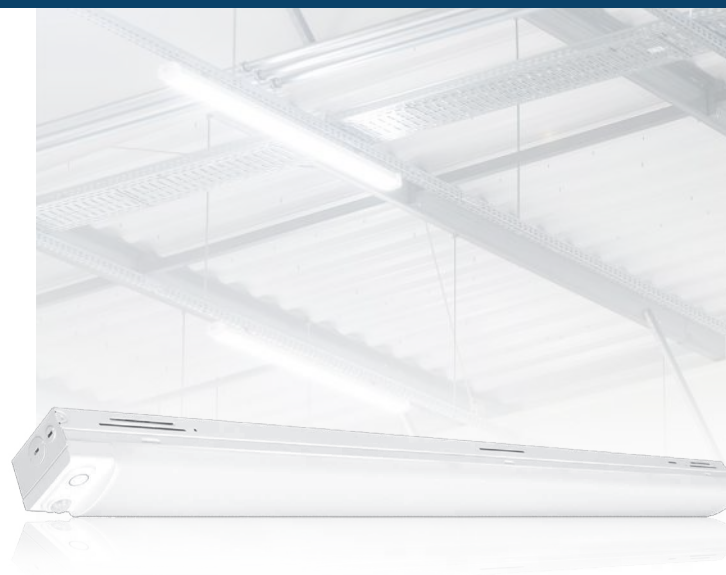

CONTROL XP



LED Selectable Troffer

Specifications



Switch Selectable
2,780 - 5,670 Lumens



Switch Selectable
3500K - 5000K CCT



Switch Selectable
20 - 45 Watts


Controls Capability

Motion Sensor

Emergency Backup

Dimensions

47.8" x 11.75" x 2"
23.75" x 23.75" x 2.13"
47.8" x 23.75" x 2.13"

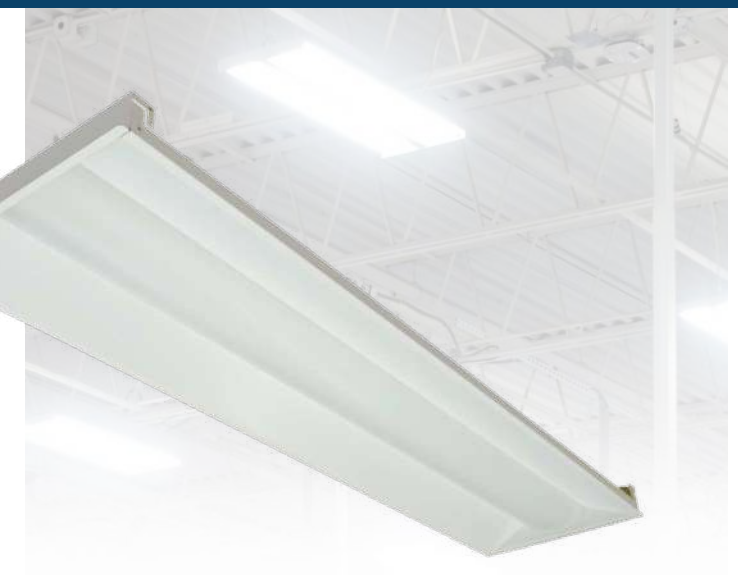

CONTRACTOR XP



LED Selectable Strip

Specifications

-  Switch Selectable
4,488 - 11,800 Lumens
-  Switch Selectable
3500K - 5000K CCT
-  Switch Selectable
34 - 90 Watts

Controls Capability

Motion Sensor
Emergency Backup

Dimensions

47.3" x 3.3" (4 ft)
94.2" x 3.3" (8 ft)

CONTRACTOR XP



LED Selectable Strip

Specifications

-  Switch Selectable
3,120 - 10,400 Lumens
-  Switch Selectable
3500K - 5000K CCT
-  Switch Selectable
24 - 80 Watts

Controls Capability

Motion Sensor
Emergency Backup

Dimensions

47.3" x 2.5" x 2.2" (4 ft) • 94.2" x 2.5" x 2.2" (8 ft)

CONTRACTOR XP



LED Selectable Wraparound

Specifications

-  Switch Selectable
3,950 - 5,600 Lumens
-  Switch Selectable
3500K - 5000K CCT
-  Switch Selectable
32 - 48 Watts

Controls Capability

Motion Sensor

Dimensions

47.6" x 5.3" x 2.1"

CONTRACTOR XP



LED Selectable Wraparound

Specifications

-  Switch Selectable
3,800 - 5,300 Lumens
-  Switch Selectable
3500K - 5000K CCT
-  Switch Selectable
28 - 40 Watts

Controls Capability

Motion Sensor
Emergency Backup

Dimensions

46" x 9.7" x 3.4"

CONTRACTOR XP





LED Selectable Stairwell

Specifications

- Switch Selectable
2,660 - 6,930 Lumens
- Switch Selectable
3500K - 5000K CCT
- Switch Selectable
20 - 55 Watts

Controls Capability

Built in Ultra-Sonic Sensor
Emergency Backup

Dimensions

23.9 x 5.6" x 4.9 (2 FT)
49.7" x 5.6" x 4.9 (4 FT)

CONTRACTOR XP



LED Selectable Vapor Tight Strip

Specifications

- Switch Selectable
1,950 - 12,000 Lumens
- Switch Selectable
3500K - 5000K CCT
- Switch Selectable
15 - 90 Watts

Controls Capability

Motion Sensor
Emergency Backup

Dimensions

24.8" x 5" x 3.6" (2 FT)
49.8" x 5" x 3.6" (4 FT)
94.5" x 5" x 3.6" (8 FT)

CONTRACTOR XP



Illuminate your space with our cutting-edge interior LED light fixtures.

Contact Our Sales Representatives for more Information.

832-459-4447



LED Selectable Vapor Tight High Bay

Specifications

- Switch Selectable
16,000 - 32,000 Lumens
- Switch Selectable
3500K - 5000K CCT
- Switch Selectable
100 - 200 Watts

Controls Capability

Motion Sensor

Dimensions

47.5" x 10.5" x 4.5"

CONTRACTOR XP



ARCHITECTURAL

15 | **Linear Architectural**

18 | **Commercial Architectural**



LED Selectable Slim Architectural Linear

Specifications


- Switch Selectable
1,760 - 11,520 Lumens
- Switch Selectable
3000K - 4000K CCT
- Switch Selectable
15 - 100 Watts

Controls Capability

Motion Sensor
Emergency Backup


Dimensions

23.86" x 2.75" x 3.15"
47.48" x 2.75" x 3.15"
94.72" x 2.75" x 3.15"

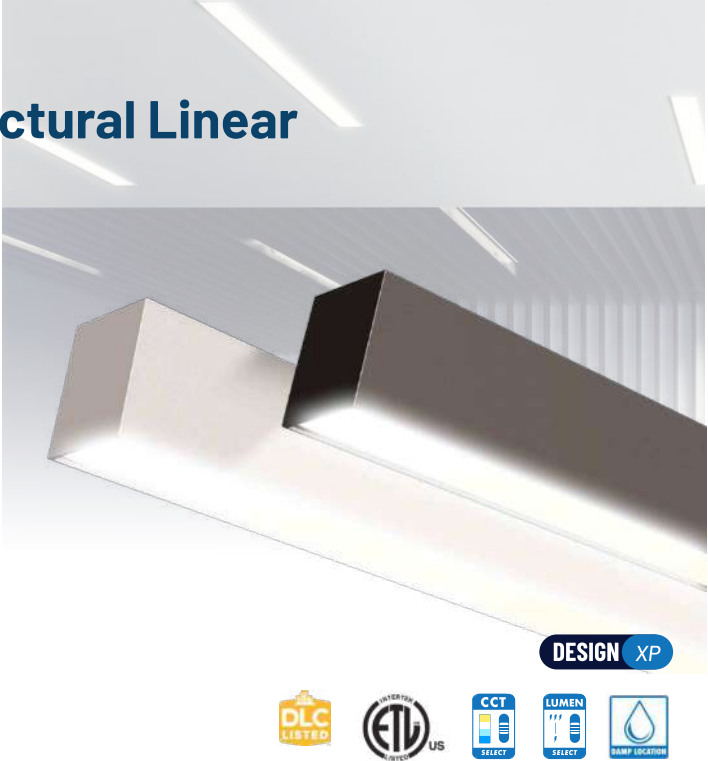

*Also available in Black.

SELECTABLE DISTRIBUTION

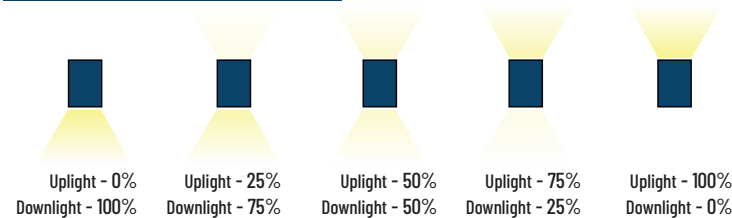


POWER CABLE


(18 Gauge, 5 conductors)




Accessories




T-Joiner



L-Joiner



X-Joiner



Buckle

Mounting Options

Drop Ceiling Suspension Kit
Drywall Suspension Kit
STB Suspension Kit
Wall Mount
Surface Mount

Lens Options


Parabolic Lens
Louver Kit

Metal Cover

Down Metal Cover
(For 100% uplight)

(For complete options, accessories, and specification details, please reference full spec sheet.)

Design Pattern

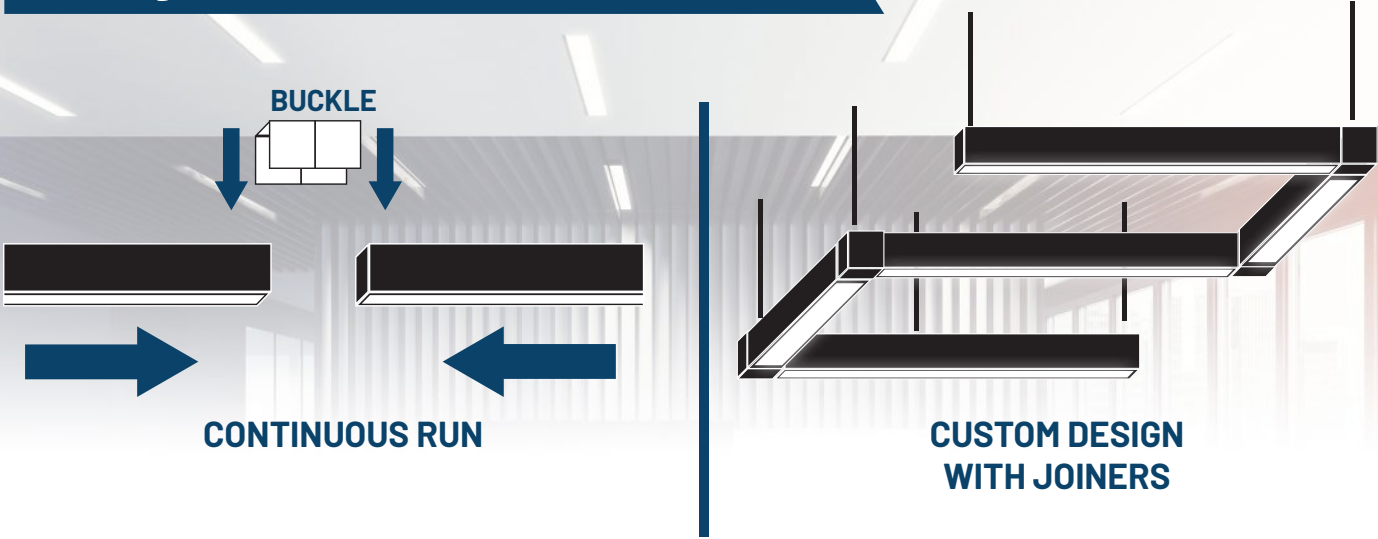

(For complete options, accessories, and specification details, please reference full spec sheet.)

DESIGN XP

Discover the Design line from National LED. Lighting for modern, affordable, and customizable lighting solutions. Whether for architectural, upscale, or aesthetic needs, this top-selling line offers sleek design, easy installation, and bright LED illumination.

National LED

Nationwide Turn-key LED Lighting Solutions.
Direct to customer shipping of LED products.

LED Selectable Slot Panel

Specifications



Switch Selectable
1,100 - 8,800 Lumens



Switch Selectable
3000K - 5000K CCT



Switch Selectable
10 - 80 Watts

Controls Capability

Motion Sensor


Emergency Backup

Dimensions

24" x 5.9" x 1.4" (2 FT)

48" x 5.9" x 1.4" (4 FT)

96" x 5.9" x 2" (8 FT)

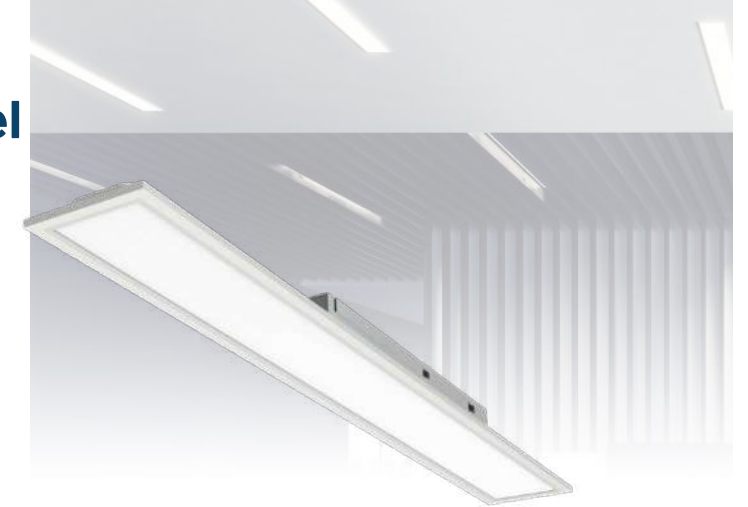

DESIGN XP



LED Selectable Luxe Troffer

Specifications



Switch Selectable
2,360 - 5,600 Lumens



Switch Selectable
3500K - 5000K CCT



Switch Selectable
20 - 50 Watts

Controls Capability

Motion Sensor

Emergency Backup

Dimensions

23.8" x 23.8" x 3.9" (2' x 2')

47.8" x 23.8" x 3.9" (2' x 4')



DESIGN XP



LED Selectable Luxe Backlit Panel



Specifications

- Switch Selectable
2,750 - 5,500 Lumens
- Switch Selectable
3500K - 5000K CCT
- Switch Selectable
25 - 50 Watts

Controls Capability

Motion Sensor
Emergency Backup

Dimensions

47.72" x 11.77" x 1.74"
23.74" x 23.74" x 1.74"
47.72" x 23.74" x 1.74"

DESIGN XP



LED T-Grid Linear Light



Specifications

- Switch Selectable
1,300 - 2,600 Lumens
- Switch Selectable
3500K - 4000K CCT
- Switch Selectable
10 - 20 Watts

Controls Capability

Emergency Backup

Dimensions

23.96" L • 47.96" L
0.48" x 0.56" • 0.51" x .94"

DESIGN XP





DRIVER

**Also available in 4000K CCT and Standard Ceiling options.*



Each driver supports up to 3 fixtures.

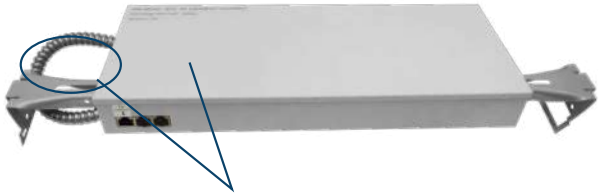


Emergency Backup Emergency Backup Emergency Backup

3 8W Emergency Backup Ports

Sales@NationalLED.com
832-459-4447



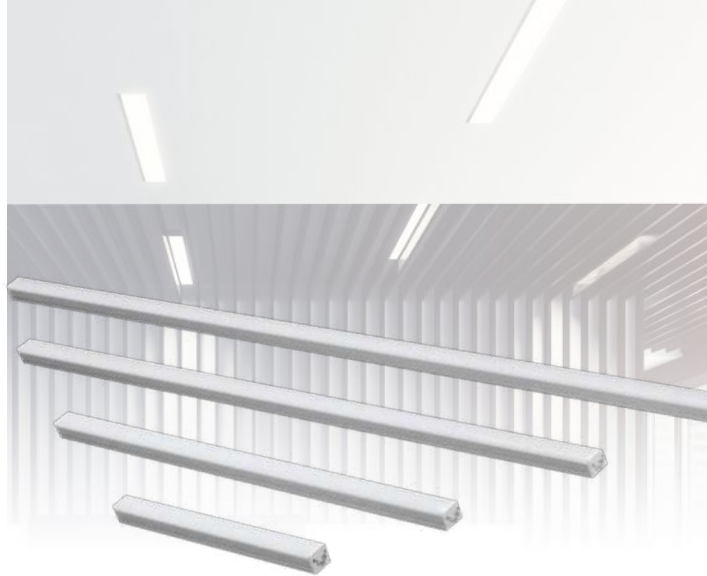

LED Slim Cove Light

Specifications

- 350 - 1,550 Lumens
- 2700K - 5000K CCT
- 4 - 16 Watts

Dimensions

- 12" x 0.87" x 0.86"
- 24" x 0.87" x 0.86"
- 36" x 0.87" x 0.86"
- 48" x 0.87" x 0.86"

DESIGN XP



TRIAC Dimming

ACCESSORIES

*Also available in 3000K, 3500K, 4000K, and 5000K CCT.



Wiring Cable
SCL-WC

Available in 7" length



Extension Cable
SCL-EC

Available in 6", 12", 24", 36", and 70" lengths



Power Cable
SCL-PC

Available in 48" length

LED Suspending Semi-Direct

Specifications

- 4,254 - 8,598 Lumens
- 3500K - 4000K CCT
- 40 - 80 Watts

Dimensions

- 47.24" x 0.94" x 7.87"
- 94.48" x 0.94" x 7.87"



DESIGN XP



LED Suspending Vertical Linear

Specifications

- 4,000 Lumens
- Switch Selectable 3000K - 4000K CCT
- 40 Watts

Controls Capability

Motion Sensor

Dimensions

- 46.50" x 1.30" x 7.48"



DESIGN XP



DOWNLIGHTS



25 | **Gimbal Downlights**

28 | **Commercial Downlights**

LED Downlight-Gimbal Direct

Specifications

- 400 - 1,050 Lumens
Switch Selectable
- 2700K - 5000K CCT
- 6 - 15 Watts

Controls Capability

Emergency Backup

Dimensions

- 2" x 1.45"
- 3" x 1.79"
- 5" x 2.25"



LED Downlight - Gimbal Swivel

Specifications

- 900 Lumens
Switch Selectable
- 2700K - 5000K CCT
- 12 Watts

Controls Capability

Emergency Backup

Dimensions

- 4" x 1.38"



LED Downlight-Gimbal Regress

Specifications

- 400 - 1,050 Lumens
Switch Selectable
- 2700K - 5000K CCT
- 6 - 15 Watts

Controls Capability

Emergency Backup

Dimensions

- 2" x 1.97"
- 3" x 2.52"
- 5" x 3.03"



LED Downlight - Gimbal Wafer

Specifications

- 750 - 1,000 Lumens
Switch Selectable
- 2700K - 5000K CCT
- 10 - 13 Watts

Controls Capability

Emergency Backup




Dimensions

- 4" x 1.48"
- 6" x 1.89"



LED Downlight-Regress

Specifications

 650 - 1,050 Lumens
Switch Selectable
 2700K - 5000K CCT
 9 - 15 Watts

Controls Capability

Emergency Backup




Dimensions

3" x 3.04" (3" Round)
3" x 3.04" (3" Square)



LED Selectable Downlights

Specifications

 Switch Selectable
595 - 5,000 Lumens
Switch Selectable
 2700K - 5000K CCT
 Switch Selectable
7 - 60 Watts

Controls Capability

Emergency Backup

Dimensions




3.54" x 2.27"
4.72" x 2.3"
5.9" x 3.07"
4.33" x 2.4"
5.51" x 2.8"



Sales@NationalLED.com
832-459-4447

LED Selectable Surface Mount Downlight

Specifications

 Switch Selectable
550 - 1,000 Lumens
Switch Selectable
 2700K - 5000K CCT
 Switch Selectable
6 - 13 Watts

Dimensions

5" x 0.79"





LED E26 Plug Base Downlight

Specifications

 750 - 1,100 Lumens

 Switch Selectable
2700K - 5000K CCT

 10 - 15 Watts

Controls Capability

Emergency Backup

Dimensions

4" x 3.27"
6" x 2.83"



LED Selectable Retrofit Downlight

Specifications

 Switch Selectable
750 - 4,000 Lumens

 Switch Selectable
2700K - 5000K CCT

 Switch Selectable
9 - 48 Watts

Controls Capability

Emergency Backup

Dimensions

4" x 4.2 • 6" x 4.8" • 8" x 5.1" • 10" x 5.6"



NationalLED

Nationwide Turn-key LED Lighting Solutions.
Direct to customer shipping of LED products.



EXTERIOR



33 | **Area Lights**

36 | **Flood lights**

38 | **String**

39 | **Wall Packs**

41 | **Canopy & Garage**

42 | **Roadway**

LED Selectable Area Light

Specifications

- Switch Selectable
10,000 - 45,000 Lumens
- Switch Selectable
3000K - 5000K CCT
- Switch Selectable
60 - 300 Watts

Controls Capability

Motion Sensor
Bluetooth Node

Dimensions

LS230: 15.6" x 2.5" x 7" • LS450: 24.9" x 2.5" x 7"



CONTRACTOR XP



LED Area Light

Specifications

- 5,500 - 40,200 Lumens
- 4000K - 5000K CCT
- 40 - 300 Watts

Controls Capability

Motion Sensor

Dimensions

12.63" x 9.25" x 2.46"
12.25" x 15.16" x 2.46"
12.25" x 28.7" x 2.45"



CONTRACTOR XP



LED Selectable Area Light

Specifications

- Switch Selectable
6,370 - 43,000 Lumens
- Switch Selectable
4000K - 5000K CCT
- Switch Selectable
40 - 300 Watts

Controls Capability

Motion Sensor

Dimensions

28.24" x 14.84" x 7.66" (Medium)
27.35" x 16" x 8" (Large)




PERFORMANCE XP



*Type IV, and Type V distributions also available. **Also available in custom colors.
***Also available in 70W/9,500 Lm (S), 100W/13,400 Lm (S), 200W/25,000 Lm (M), 300W/40,200 (L), HVU, as well as 5000K CCT versions.

Mounts:

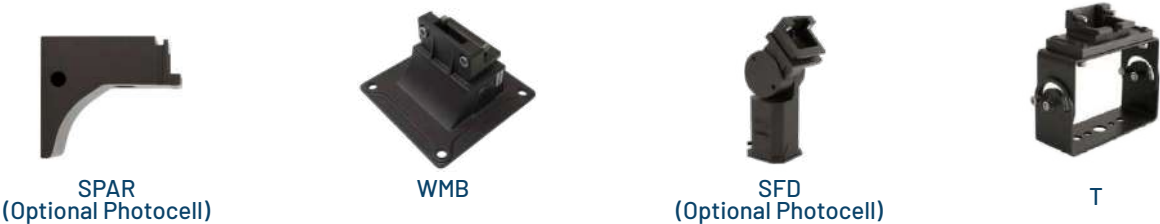



LED Dusk To Dawn

Specifications

 6,200 - 12,200 Lumens

 4000K - 5000K CCT

 45 - 90 Watts

Dimensions

9.7" x 7.6"

PERFORMANCE XP



LED Selectable Round Floodlights

Specifications

 Switch Selectable
1,400 - 4,200 Lumens

 Switch Selectable
3000K - 5000K CCT

 Switch Selectable
10.5 - 30 Watts

Dimensions

8.51" x 6.53"



DESIGN XP



Sales@NationalLED.com
832-459-4447



CONTRACTOR XP



LED Selectable Flood Light

Specifications

 Switch Selectable
1,600 - 18,000 Lumens

 Switch Selectable
3000K - 5000K CCT

 Switch Selectable
11 - 123 Watts

Controls Capability

Built in Photocell

Dimensions

7.2" x 6.9" x 1.9" (Small)

8.1" x 8.3" x 2" (Medium)

10.4" x 8.3" x 3.3" (Large)

LED Flood Light Series

Specifications

 2,000 - 49,500 Lumens

 4000K - 5000K CCT

 15 - 350 Watts

Controls Capability

Emergency Backup

Dimensions

- 5.90" x 2.55 x 3.82" (Small)
- 7.87" x 3.12 x 4.80" (Medium)
- 11.06" x 4.90" x 6.08" (Large)
- 14.53" x 4.37" x 12.56" (X-Large)
- 14.53" x 5.23" x 17.99" (Huge)



CONTRACTOR XP



LED Flat Flood Light Series

Specifications

 5,720 - 41,000 Lumens

 4000K - 5000K CCT

 40 - 300 Watts

Controls Capability

Motion Sensor

Dimensions

- 12.64" x 8.47" x 2.2" (Small)
- 15.16" x 12.55" x 2.2" (Medium)
- 23.3" x 12.55" x 2.2" (Large)



CONTRACTOR XP



LED Flat Flood Light Series

Specifications

 10,250 - 51,450 Lumens

 3000K - 5000K CCT

 70 - 380 Watts

Controls Capability

Motion Sensor

Dimensions

- 9.72" x 14.84" x 7.66" (Medium)
- 27.35" x 16" x 6.3" (Large)

PERFORMANCE XP



CONTRACTOR XP



LED High Output String Lights

Specifications

 16,000 Lumens

 5000K CCT

 130 Watts

Dimensions

3.94" x 2.28 x 100'

LED Selectable Cutoff Wall Pack

Specifications

- Switch Selectable
2,750 - 13,800 Lumens
- Switch Selectable
3000K - 5000K CCT
- Switch Selectable
18 - 95 Watts

Controls Capability

Motion Sensor
Emergency Backup

Dimensions

13.1" x 9.6" x 3.8"



PERFORMANCE XP



LED Selectable Wall Pack

Specifications

- Switch Selectable
3,860 - 11,500 Lumens
- Switch Selectable
3000K - 5000K CCT
- Switch Selectable
26 - 100 Watts

Controls Capability

Photocell
Emergency Backup

Dimensions

14.2" x 9.25" x 7.08"



CONTRACTOR XP



LED Selectable Full Cutoff Wall Pack

Specifications

- Switch Selectable
4,000 - 9,800 Lumens
- Switch Selectable
3000K - 5000K CCT
- Switch Selectable
23 - 65 Watts


Controls Capability

Built in Photocell
Emergency Backup

Dimensions

13.1" x 9.6" x 3.8"

CONTRACTOR XP

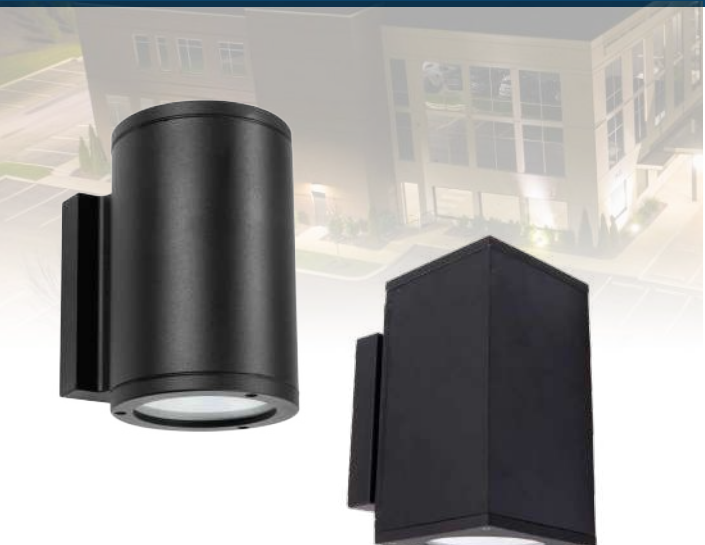

DESIGN XP



LED Wall Mount Cylinder

Specifications

- Switch Selectable
2,250 - 3,325 Lumens
- 3000K - 4000K CCT
- Switch Selectable
25 - 35 Watts

Dimensions

4.09" x 4.09" x 7.24 (4" Square)
4.09" x 7.08" (4" Round)

LED Selectable Canopy

Specifications

- Switch Selectable
4,000 - 8,400 Lumens
- Switch Selectable
3000K - 5000K CCT
- Switch Selectable
25 - 60 Watts

Controls Capability

- Motion Sensor
- Emergency Backup

Dimensions

9.52" x 9.52" x 3.03"



CONTRACTOR XP



LED Versatile Parking Garage

Specifications

- 5,470 - 11,584 Lumens
- 4000K - 5000K CCT
- 45 - 95 Watts

Controls Capability

- Motion Sensor
- Emergency Backup

Dimensions

23.6" x 6" x 3.7"



PERFORMANCE XP



LED Selectable Parking Garage

Specifications

- Switch Selectable
4,480 - 10,400 Lumens
- Switch Selectable
4000K - 5000K CCT
- Switch Selectable
32 - 80 Watts

Controls Capability

- Motion Sensor
- Emergency Backup

Dimensions

13.04" x 3.26"



PERFORMANCE XP



LED Roadway Area Light

Specifications

- 6,350 - 20,000 Lumens
- 4000K - 5000K CCT
- 45 - 150 Watts

Controls Capability

- Motion Sensor
- Emergency Backup

Dimensions

23.84" x 10.43" x 4.25"



PERFORMANCE XP





LED Selectable Post Top

Specifications

- Switch Selectable
6,800 - 17,300 Lumens
- Switch Selectable
3000K - 5000K CCT
- Switch Selectable
45 - 130 Watts

Controls Capability

Motion Sensor

Dimensions

9.52" x 9.52" x 3.03"



LED Bollard Luminaire

Specifications

- 2,500 Lumens
Switch Selectable
- 3000K - 5000K CCT
- 26 Watts

Controls Capability

Emergency Backup


Dimensions

9.28"/5.5" x 42"

Illuminate your outdoor space
with our cutting-edge LED
landscape light fixtures.

Contact Our Sales Representatives for more Information.

832-459-4447

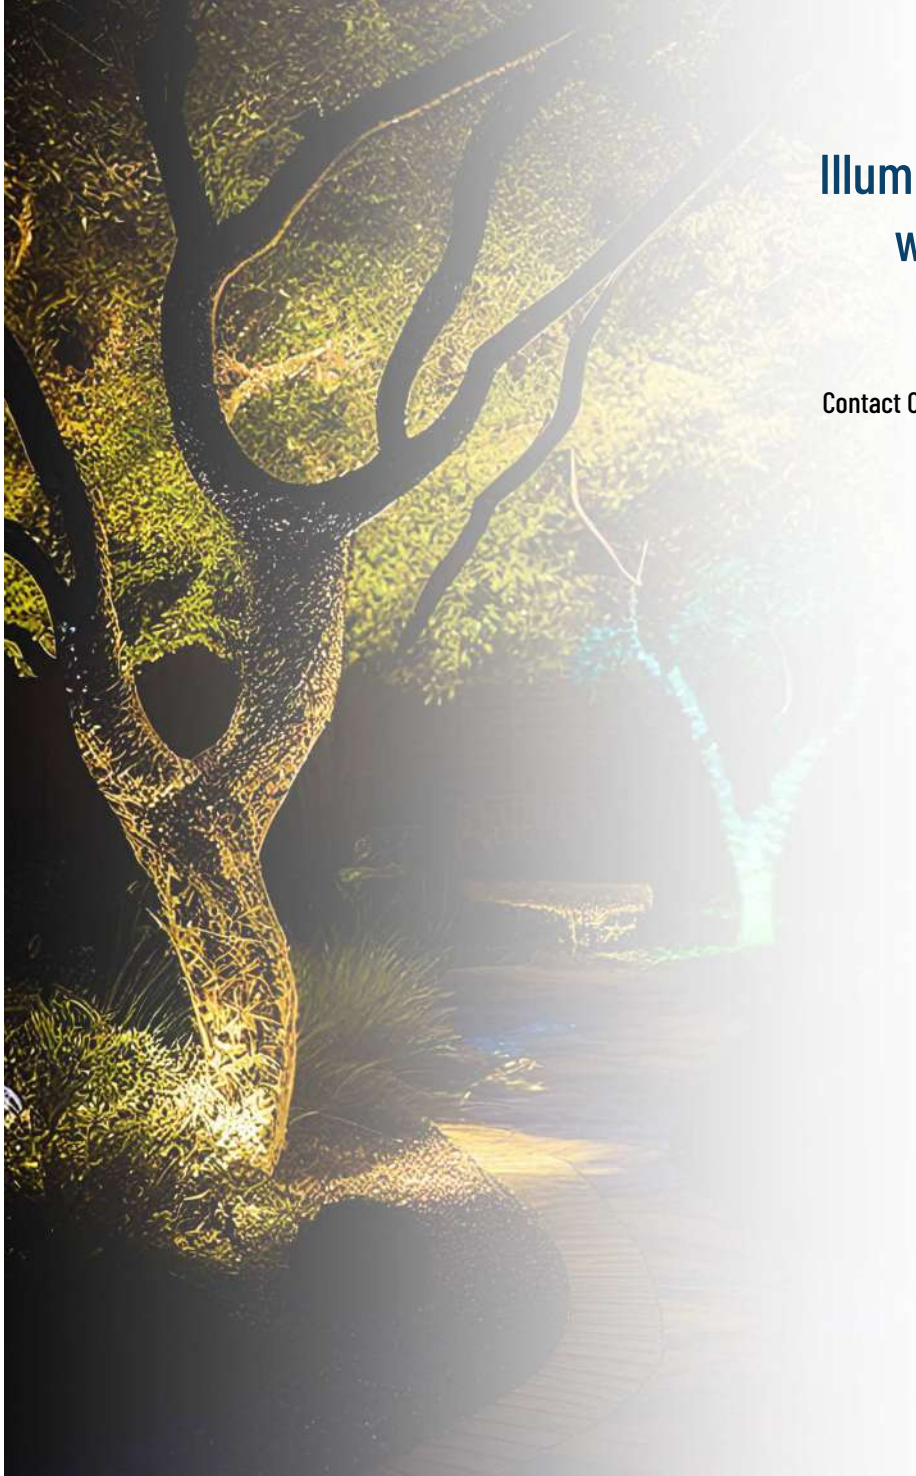



LED Remote Driver Sports Light

Specifications

 70,000 - 160,000 Lumens

 4000K - 5700K CCT

 500 - 1200 Watts

Controls Capability



Dimensions

20.8" x 16.9" x 18.8" (Small)
23.8" x 19.7" x 21.7" (Large)



PERFORMANCE XP



PERFORMANCE DATA

SIZE	SYSTEM WATTS	VOLTAGE	EMA	LUMENS (4000K)	LUMENS (5000K)	LUMENS (5700K)
SMALL	600W	200-480V	4Hx4V	92,000 Lm	92,000 Lm	90,000 Lm
			3Hx3V	92,000 Lm	92,000 Lm	90,000 Lm
LARGE	1200W	200-480V	3Hx3V	16,000 Lm	16,000 Lm	15,000 Lm
			2Hx2V	16,000 Lm	16,000 Lm	15,000 Lm



The driver can either be mounted behind...



...or pole mounted for easier access!

LED RGB Sports Light

Specifications

 BLUE: 2000 Lm GREEN: 10,000 Lm RED: 12,000 Lm

 500 Watts

Controls Capability



Dimensions

20.8" x 16.9" x 18.8"



PERFORMANCE XP



PERFORMANCE DATA

SIZE	SYSTEM WATTS	VOLTAGE	EMA	LUMENS (RED)	LUMENS (GREEN)	LUMENS (BLUE)
SMALL	500W	120-277V 347-480V	4Hx4V	12,000 Lm	10,000 Lm	2,000 Lm



The driver can either be mounted behind...



...or pole mounted for easier access!

LED Sports Light Series

Specifications

 82,000 - 113,000 Lumens

 4000K - 5700K CCT

 600 - 850 Watts

Controls Capability

Advanced Wireless Controls

Dimensions

20.6" x 15.2" x 15.2" (Rec)

23.8" x 18.5" x 17.46" (Pro)

PERFORMANCE XP



Sales@NationalLED.com

832-459-4447

LED STRIKER Series

Specifications

 60,000 - 270,000 Lumens

 400 - 1800 Watts

Controls Capability


Advanced Wireless Controls



PERFORMANCE XP



Type-A Top-fixed I

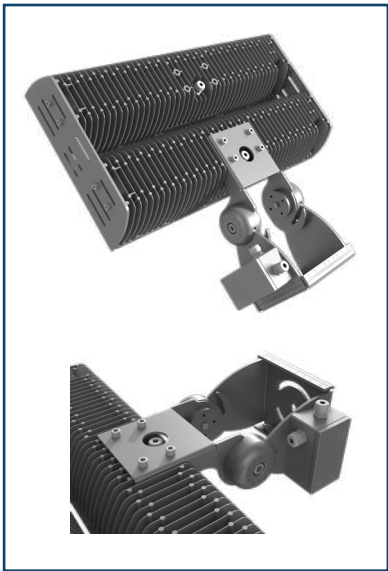

Versatile Mounting

Nationwide Turn-key LED Lighting Solutions

DESIGN

Our engineers tailor designs to fit your specific requirements and budget.

MANUFACTURING

Our expert team creates tailored LED lights for your installation needs, ensuring top performance and reliability.

INSTALLATION

Our team ensures seamless integration, maximizing efficiency and illuminating your business with brilliance. Our crew has years of experience installing commercial LED lights.


SALES

Our sales team provides expert guidance on a range of sleek designs and cutting-edge technology, specializing in commercial LED lights for diverse industries.

Types of Sports & Stadium Lighting We Service

- Football
- Baseball
- Softball
- Pickleball
- Soccer
- Stadium
- Racetrack
- Athletic Facility
- Tennis Court
- Arena

BENEFITS OF LED LIGHTING

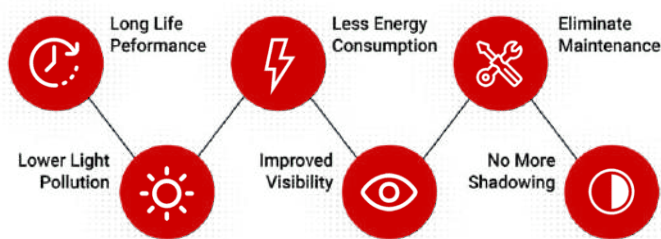

National LED

Contact Our Sales Representatives for more Information.

832-459-4447



National LED Smart Lighting System

Unlimited options for LED lighting controls and On/Off controls from your smart phone



Smart lighting systems utilize network connectivity and advanced technology for improved control, automation, and energy management. They enable remote control via mobile apps or voice commands, adjust dynamically based on user preferences and occupancy, and provide energy usage insights for optimization.

Switches and Dimmers



Traditional switches turn lights on/off manually, while dimmers adjust brightness for ambiance control.

Occupancy Sensors



Occupancy sensors detect motion and automatically illuminate spaces. They can shut off lights to save energy when rooms are vacant.

Daylight Harvesting Systems



Daylight harvesting systems adjust artificial lighting based on natural light levels, ensuring consistent illumination while saving energy.

Time-Based Controls

With time-based controls users schedule lighting operations by time, adjusting brightness or activating scenes for various events.

Manual and Automated Scene Controls



Users preset and recall lighting scenes, creating different atmospheres with a push of a button or through centralized systems.

Centralized Control Systems

These systems manage lighting across buildings or locations, offering features like remote monitoring, scheduling, energy management, and integration with other systems.

59	Hazardous Location
61	Industrial LED



Round High Bay Hazardous Location

Class 1 - Division 2 - Groups A/B/C/D

Specifications

- 12,000 - 30,000 Lumens
- 3000K - 5000K CCT



Vapor Tight Linear Hazardous Location

Class 1 - Division 2 - Groups A/B/C/D

Specifications

- 2000 - 10000 Lumens
- 3000K - 5000K CCT



Viento Flood Large Hazardous Location

Class 1 - Division 2 - Groups A/B/C/D

Specifications

- 14286 - 37267 Lumens
- 4000K CCT



Vapor Tight High Bay Hazardous Location

Class 1 - Division 2 - Groups A/B/C/D

Specifications

- 9000 - 18000 Lumens
- 3000K - 4000K CCT



Viento Flood Small Hazardous Location

Class 1 - Division 2 - Groups A/B/C/D

Specifications

- 5500 - 10000 Lumens
- 3000K - 5000K CCT



Sales@NationalLED.com



832-459-4447



Guardian

SLL

Specifications

-  50000 - 100000 Lumens
-  4000K - 5000K CCT



Vapor Tight High Bay

VTH

Specifications

-  9000 - 30000 Lumens
-  3000K - 5000K CCT



Vapor Tight Co-Extruded

VTC

Specifications

-  2000 - 10000 Lumens
-  3000K - 5000K CCT



Vapor Tight Slim Linear

VTS

Specifications

-  3500 - 5500 Lumens
-  3000K - 5000K CCT



Vapor Tight Linear

VTE

Specifications

-  2000 - 10000 Lumens
-  3000K - 5000K CCT



Contact Our Sales
Representatives for more
Information.

832-459-4447



IN-HOUSE PHOTOMETRICS

Our team of Lighting Specialists are on staff in our Houston, TX office M-F, ready to help you have the best lighting for you and your projects.

Send all inquiries to:
Sales@NationalLED.com

Or contact your local National LED Lighting
rep to help you along the way.

832-459-4447

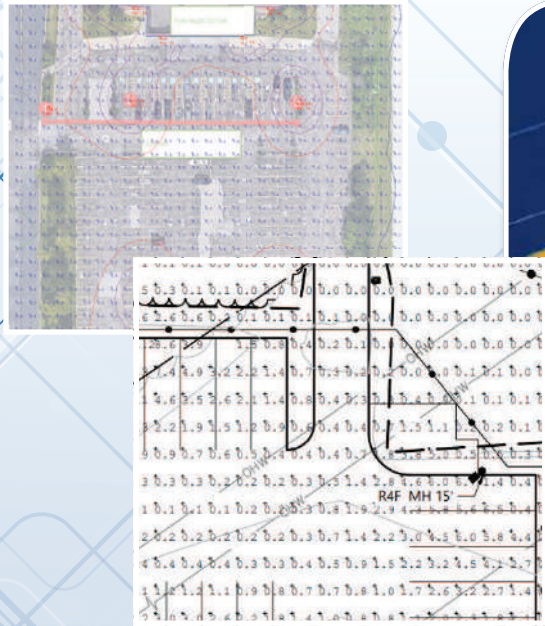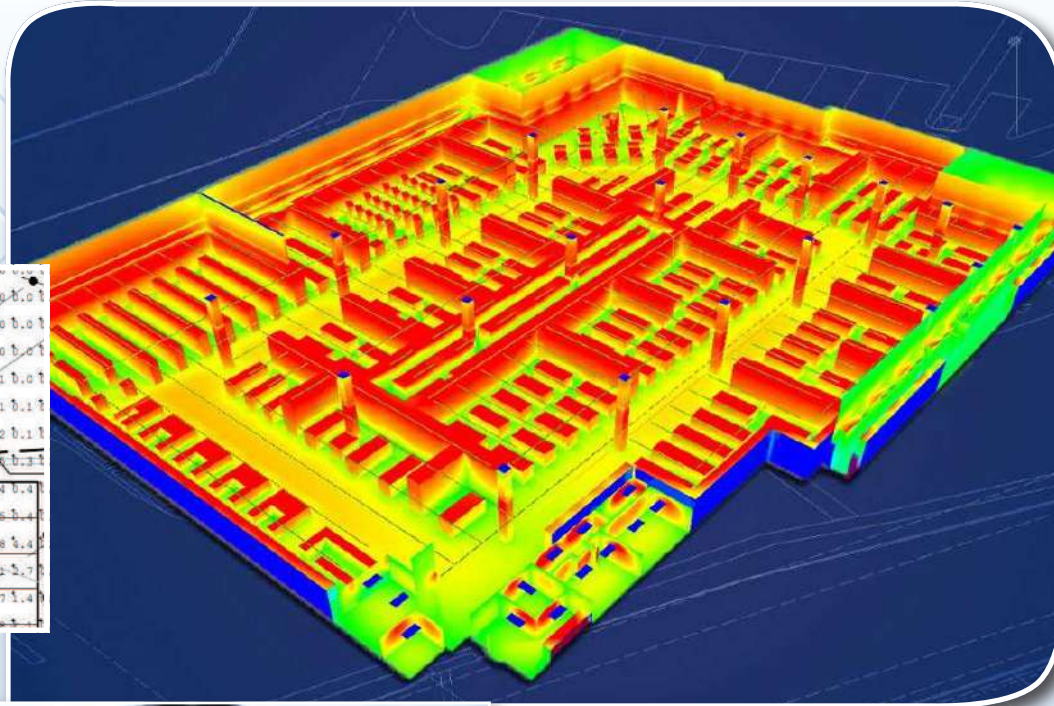

National LED

Sales

832-459-4447

Sales@NationalLED.com

NationalLed.com