

iSSL+ All-in-One Solar Street Light



10 years warranty

iSSL+, THE SMARTEST ALL-IN-ONE SOLAR STREET LIGHT

iSSL+ is the world's most reliable all-in-one solar lighting solution, and the result of 10 years of research and development. iSSL+ offers unrivalled performance, thanks to a patented energy management system (EMS) that guarantees optimal efficiency, 365 days a year, whatever the installation environment. Fully plug & play, the installation of a lamp post has never been as simple and quick as with the iSSL® range. iSSL+ is perfect for parking lots, perimeter and general area lighting.



HORIZONTAL SOLAR PANELS

High efficiency frameless PV panels that prevent dust accumulation.

AEROSPACE-GRADE BATTERY TECHNOLOGY

High Density NiMH battery offering 12 years lifespan in real-life conditions of use (as per IEC 61427 standard)

REMOTE MONITORING

Lights that tell you when and where they need attention.

ADAPTIVE LIGHTING

Illumination only when and where you need it with custom operating profiles, scheduled dimming and motion sensing capabilities.

THEFT-PROOF

Anti-theft screws and sealed solar panels prevent anyone from stealing your light. (option)

SUNNAPP™, your mobile companion

প Installation and commissioning support

Lighting profiles management

<u>&</u>

lili Data log and performances monitoring

Registration and mapping of installed devices



SMART LIGHTING MANAGEMENT

With patented built in intelligence, our lights gather weather data from the previous few days while constantly monitoring the amount of energy available in the battery. It automatically combines this knowledge to regulate light flow and avoid any interruption in lighting service

SUNNA CLOUD: REMOTE MONITORING

Our cloud-based supervision platform allows you to monitor the status of your lights from any device, anywhere. (Optional)

SPECIFICATIONS

LIGHTING	
Efficiency	Up to 175 lm/W
Color temperature	3000K, 4000K & 5700K
Lifespan	50 000 hours (12 years)
Max power	Up to 20W*
Nominal power	10W
Motion sensor	Optional

*autonomy	/ will	depend	on	lighting	power


BATTERY	
Technology	NiMH high temperature Nickel Metal Hydride
Voltage	12V
Autonomy	Up to 3 days
Lifespan	12 years

SOLAR PANELS	
Technology	Mono-crystalline photovoltaic panels
Power	50 Wp
Lifespan	25 years


GENERAL	
Dimensions	1000 x 375 x 105 mm
Mounting	Top or side mounting, Ø60 mm
Weight	12 kg (41lbs) without pole
Protection	IP65
Working temperature	-40°C to +70°C (-40°F to +158°F)
Connectivity	Bluetooth
Remote monitoring	Optional

LIGHT DISTRIBUTION


NARROW ROAD



MEDIUM ROAD



AREA & WIDE ROAD



AVAILABLE STANDARD COLORS








RAL 9010



RAL 8019



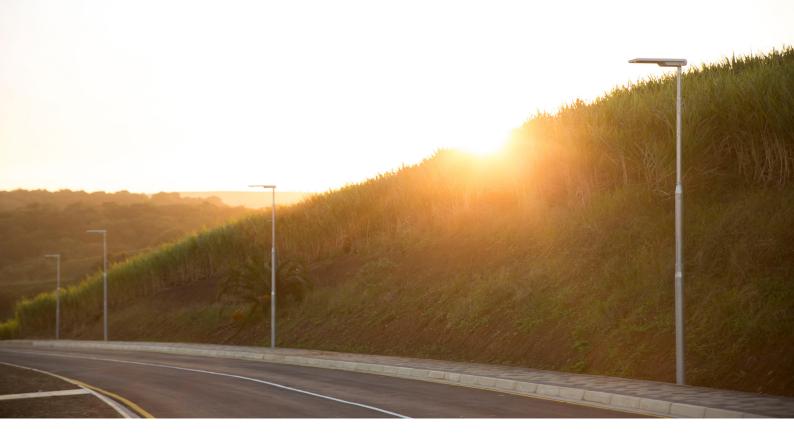



iSSL Maxi All-in-One Solar Street Light





NO BLACKOUT FEATURE



REMOTE MONITORING AND COMMUNICATION



PLUG AND PLAY




UNIQUE RESISTANCE TO EXTREME CLIMATES

> 10 years warranty

ISSL MAXI, THE SMARTEST ALL-IN-ONE SOLAR STREET LIGHT

iSSL Maxi is the world's most reliable all-in-one solar lighting solution, and the result of 10 years of research and development. iSSL Maxi offers unrivalled performance, thanks to a patented energy management system (EMS) that guarantees optimal efficiency, 365 days a year, whatever the installation environment. Fully plug & play, the installation of a lamp post has never been as simple and quick as with the iSSL® range. iSSL Maxi is perfect for parking lots, perimeter and general area lighting.

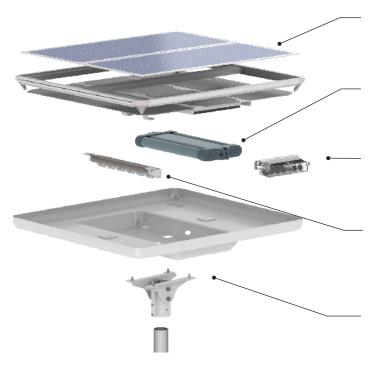

HORIZONTAL SOLAR PANELS

High efficiency frameless PV panels that prevent dust accumulation.

AEROSPACE-GRADE BATTERY TECHNOLOGY

High Density NiMH battery offering 12 years lifespan in real-life conditions of use (as per IEC 61427 standard)

REMOTE MONITORING

Lights that tell you when and where they need attention.


ADAPTIVE LIGHTING

Illumination only when and where you need it with custom operating profiles, scheduled dimming and motion sensing capabilities.

THEFT-PROOF

Anti-theft screws and sealed solar panels prevent anyone from stealing your light. (option)

SUNNAPP™, your mobile companion



📯 Lighting profiles management

حگ

Data log and performances monitoring

Registration and mapping of installed devices



SMART LIGHTING MANAGEMENT

With patented built in intelligence, our lights gather weather data from the previous few days while constantly monitoring the amount of energy available in the battery. It automatically combines this knowledge to regulate light flow and avoid any interruption in lighting service

SUNNA CLOUD: REMOTE MONITORING

Our cloud-based supervision platform allows you to monitor the status of your lights from any device, anywhere. (Optional)

SPECIFICATIONS

LIGHTING	
Efficiency	Up to 175 lm/W
Color temperature	3000K, 4000K & 5700K
Lifespan	50 000 hours (12 years)
Max power	Up to 40W*
Nominal power	20W
Motion sensor	Optional

				10 1 40	
*autonomy	Will	depend	on	lighting	power


BATTERY	
Technology	NiMH high temperature Nickel Metal Hydride
Voltage	24V
Autonomy	Up to 3 days
Lifespan	12 years

SOLAR PANELS	
Technology	Mono-crystalline photovoltaic panels
Power	80 Wp (2x40Wp)
Lifespan	25 years


GENERAL	
Dimensions	820 x 755 x 105 mm
Mounting	Top on a pole, Ø60 mm
Weight	19 kg (42 lbs) without pole
Protection	IP65
Operating temperature:	-40°C to +70°C (-40°F to +158°F)
Connectivity	Bluetooth
Remote monitoring	Optional

LIGHT DISTRIBUTION


NARROW ROAD



MEDIUM ROAD



AREA & WIDE ROAD



TWO MODELS AVAILABLE

iSSL MAXI AREA



ISSL MAXI ROAD





RAL 9010







iSSL Maxi 4 All-in-One Solar Street Light





REMOTE MONITORING AND COMMUNICATION



PLUG AND PLAY




UNIQUE RESISTANCE TO EXTREME CLIMATES

> 10 years warranty

ISSL MAXI 4, THE SMARTEST ALL-IN-ONE SOLAR STREET LIGHT

iSSL Maxi 4 is the world's most reliable all-in-one solar lighting solution, and the result of 10 years of research and development. iSSL Maxi 4 offers unrivalled performance, thanks to a patented energy management system (EMS) that guarantees optimal efficiency, 365 days a year, whatever the installation environment. Fully plug & play, the installation of a lamp post has never been as simple and quick as with the iSSL® range. iSSL Maxi 4 is perfect for parking lots, perimeter and general area lighting.

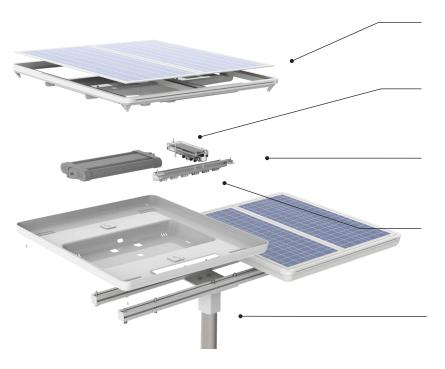

HORIZONTAL SOLAR PANELS

High efficiency frameless PV panels that prevent dust accumulation.

AEROSPACE-GRADE BATTERY TECHNOLOGY

High Density NiMH battery offering 12 years lifespan in real-life conditions of use (as per IEC 61427 standard)

REMOTE MONITORING

Lights that tell you when and where they need attention.

ADAPTIVE LIGHTING

Illumination only when and where you need it with custom operating profiles, scheduled dimming and motion sensing capabilities.

THEFT-PROOF

Anti-theft screws and sealed solar panels prevent anyone from stealing your light. (option)

SUNNAPP™, your mobile companion

installation and commissioning support

Lighting profiles management

lili Data log and performances monitoring

Registration and mapping of installed devices



SMART LIGHTING MANAGEMENT

With patented built in intelligence, our lights gather weather data from the previous few days while constantly monitoring the amount of energy available in the battery. It automatically combines this knowledge to regulate light flow and avoid any interruption in lighting service

SUNNA CLOUD: REMOTE MONITORING

Our cloud-based supervision platform allows you to monitor the status of your lights from any device, anywhere. (Optional)

SPECIFICATIONS

LIGHTING	
Efficiency	Up to 175 lm/W
Color temperature	3000K, 4000K & 5700K
Lifespan	50 000 hours (12 years)
Max power	Up to 80W*
Nominal power	40W
Motion sensor	Optional
	*autonomy will depend on lighting power

NiMH high temperature Nickel Metal

Technology	NiMH high temperature Nickel Metal Hydride
Voltage	24V
Autonomy	Up to 3 days
Lifespan	12 years


SOLAR PANELS	
Technology	Mono-crystalline photovoltaic panels
Power	160 Wp (4x40Wp)
Lifespan	25 years

GENERAL	
Dimensions	1684 x 753 x 300 mm
Mounting	Top mounting, Ø76 mm
Weight	42 kg (92 lbs) without pole
Protection	IP65
Working temperature	-40°C to +70°C (-40°F to +158°F)
Connectivity	Bluetooth
Remote monitoring	Optional


LIGHT DISTRIBUTION

BATTERY


NARROW ROAD



MEDIUM ROAD



AREA & WIDE ROAD



TWO MODELS AVAILABLE

iSSL MAXI 4 AREA



iSSL MAXI 4 ROAD





