

PROJECT: \_\_\_\_\_  
 CATALOG #: \_\_\_\_\_  
 FIXTURE TYPE: \_\_\_\_\_  
 NOTES: \_\_\_\_\_

## PG Parking Garage Gen 2



### PERFORMANCE INFORMATION

SERIES NUMBER	WATT	LUMENS	CCT
PG 35 G2 5K	27W	3,550	5000K
PG 55 G2 5K	45W	5,500	5000K
PG 75 G2 5K	60W	7,600	5000K
PG 115 G2 5K	90W	11,600	5000K

The **PG Parking Garage Gen 2 Series** offers extended lumen packages that range from 3,550 to 11,600 lumens. A unique “halo-lens” design provides smooth and even distribution and directs the light to desired locations. High-temperature polycarbonate lens reduces yellowing and the housing has improved weatherproofing. Unlike the previous generation, the optional emergency battery backup kit fits neatly within the larger housing. This fixture is ideal for applications ranging from Parking Structures, Storage Areas, Entryways, and Low-Level Security Lighting.

### APPLICATIONS

Parking Garages, Canopy, Stairwells, Low Bay applications, etc.

### REPLACEMENT

100W - 250W MH

### OPTIONS



MS-FSP-202/221B



L2/L3



EL UNV-8W

### PG G2 ORDERING GUIDE

ORDERING EXAMPLE:  
**PG 75 G2 4K**

Luminaire	Lumen Output	Gen	Voltage	CCT	Finish	Options
<b>PG</b> Parking Garage	<b>35</b> 3500 Lm / 27W	<b>G2</b> Gen 2	<b>BLANK</b> 120-277V	<b>4K</b> 4000K	<b>BLANK</b> White	<b>BLANK</b> No option <b>MS-FSP-211</b> Motion Sensor <b>MS-FSP-221B</b> Motion Sensor 347-480V (choose a lens) <b>L2</b> 360° lens up to 8' mounting height - coverage equals 6X the height <b>L3</b> 360° lens 8'-20' mounting height - coverage equals 2X the height <b>MS-LPS-202</b> Motion Sensor (choose a lens) <b>L2</b> 360° lens up to 8' mounting height <b>L3</b> 360° lens 8'-20' mounting height <b>EL UNV-8W</b> Emergency Backup Kit
	<b>115</b> 11500 Lm / 90W			<b>5K</b> 5000K		
	<b>55</b> 5500 Lm / 45W		<b>BLANK</b> 120-277V			
	<b>75</b> 7500 Lm / 60W		<b>HVU</b> 347-480V			

Due to continuous product improvements, specification and/or equipment updates may change without notice.

## SPECIFICATIONS

### HOUSING

Sealed die-cast aluminum housing.

### AMBIENT TEMPERATURE

Suitable for use in -40°C to +45°C (-40°F to 113°F)

### MOUNTING

Surface mount or Pendant mount with conduit. J-box is not included.

### EFFICACY

Up to 131 lumens per watt (see individual wattage data)

### CCT AND CRI

4000 and 5000K CCT available; > 70CRI

### OPTICS

Vacuum metalized specular reflector with frosted polycarbonate lens.

### WARRANTY

10-year limited warranty. This product is eligible for the labor warranty.

### ELECTRICAL

50/60Hz operation with 120-277V input. Optional 347-480V input. Standard 0-10V dimming.

### ENERGY DATA

Power Factor above 90%.


### FINISH

Polyester Powder White finish.

### CERTIFICATIONS

UL Listed for wet locations, IP65 Rating. FCC compliant. RoHS compliant. Design Lights Consortium® (DLC) Premium 5.0 qualified product. Not all versions of this product may be DLC qualified. Please visit [www.slgus.com](http://www.slgus.com) to confirm which versions are qualified.

## MOUNTING

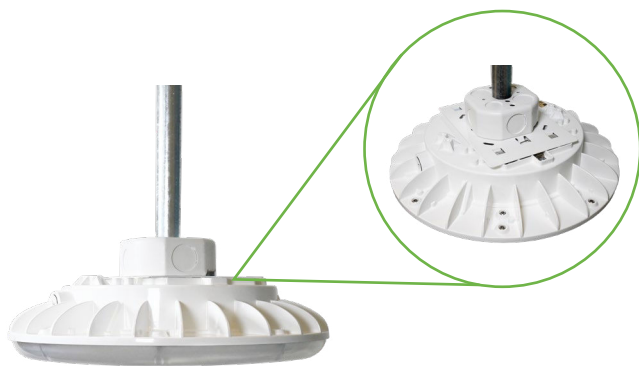

PENDANT MOUNT

\*J-box not included



SURFACE MOUNT



Due to continuous product improvements, specification and/or equipment updates may change without notice.

OPTIONS



MS-LPS-202  
Motion Sensor



L2/L3  
Lens




The **MS-LPS-202** provides multi-level control over motion and daylight levels. This sensor is IP66 rated when installed inside the fixture. The L2 Lens is designed for mounting heights less than 8 ft whereas the L3 Lens is suitable for mounting heights up to 20 ft in parking garage applications.

Operation Voltage	Shape	Adjustable Time Delay	Fade Down Time	Operating Temperature	MS-FSP-L2 Mounting Height	MS-FSP-L3 Mounting Height
120-277V	Cone	30 sec - 30 min (Default 15min)	0-10 sec	-40°F to 158°F (-40°C to 70°C)	Maximum 8 ft*	Maximum 20 ft*

\* Covers 48 ft diameter when the mounting height is 8 ft. Coverage is equal to 6x the height.




\*\* Covers 40 ft diameter when mounting height is 20 ft. Coverage is equal to 2x the height.

FSP-L2




PG G2 with MS-LPS-202  
Motion Sensor

FSP-L3

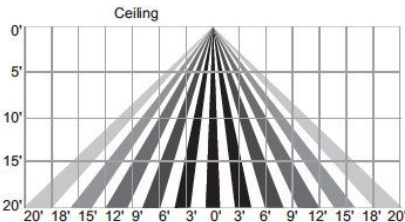


Due to continuous product improvements, specification and/or equipment updates may change without notice.


DIMENSIONS

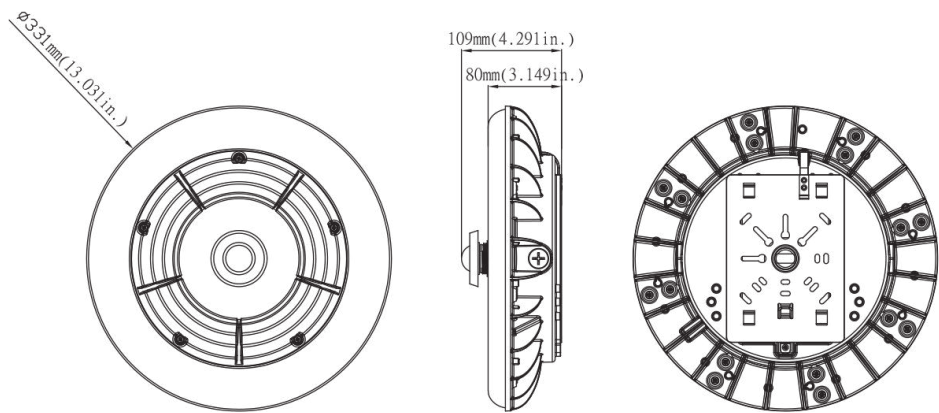

PHOTOMETRIC

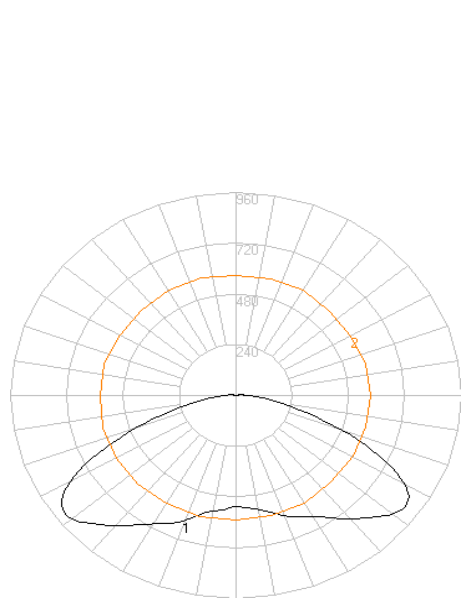


Mounting Height	8	9	10	11	12
Multiplier	1.6	1.2	1.0	0.8	0.7

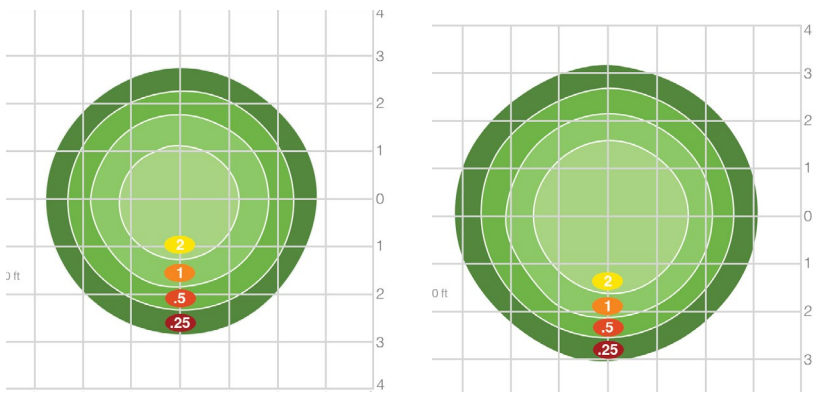

PG 35 G2 4K

PG 55 G2 4K

MOUNTING HEIGHT: 12FT

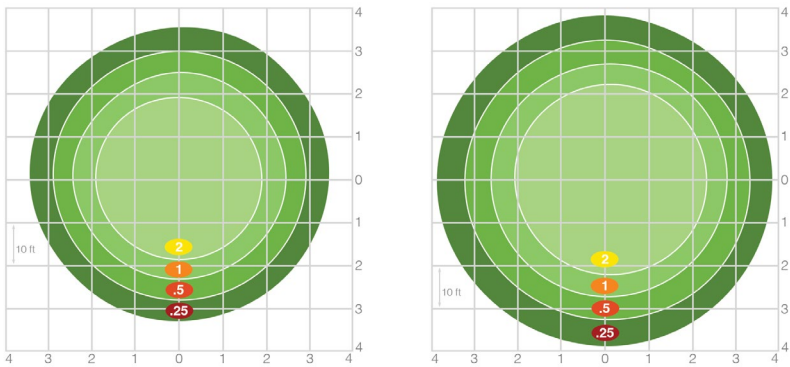

PG 75 G2 4K

PG 115 G2 4K

Due to continuous product improvements, specification and/or equipment updates may change without notice.

## PERFORMANCE COMPARISON

			4000K	5000K		
Series Number	Watt	Voltage	Lumens	Lumens	Replaces	Mounting Height
PG 35 G2 4K	27W	120-277V	3500lm	3550lm	100W	10-20'
PG 55 G2 4K	45W	120-277V	5400lm	5500lm	150W	10-20'
PG 75 G2 4K	60W	120-277V	7500lm	7600lm	175W	10-20'
PG 55 G2 HVU 4K	48W	347-480V	5850lm	6000lm	150W	10-20'
PG 75 G2 HVU 4K	60W	347-480V	7500lm	7600lm	175W	10-20'
PG 115 G2 4K	90W	120-277V	11400lm	11600lm	250W	10-20'

## ELECTRICAL LOAD

Current (A)						
Wattage	120V	208V	240V	277V	347V	480V
27W	0.23	0.13	0.11	0.10	n/a	n/a
45W	0.38	0.22	0.19	0.16	n/a	n/a
48W	n/a	n/a	n/a	n/a	0.14	0.10
60W	0.50	0.29	0.25	0.22	0.17	0.13

Due to continuous product improvements, specification and/or equipment updates may change without notice.