


PROJECT: \_\_\_\_\_  
 CATALOG #: \_\_\_\_\_  
 FIXTURE TYPE: \_\_\_\_\_  
 NOTES: \_\_\_\_\_

## SL Slot Recessed Linear Gen 1 Design Series

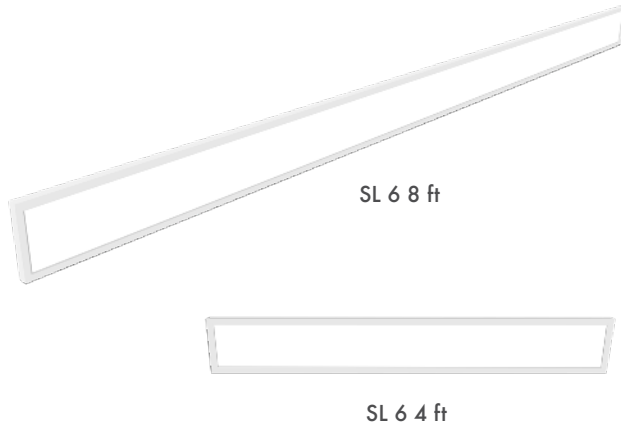

The *SL Slot Recessed Linear Gen 1 Design Series* is an edge-lit panel that offers balanced illumination and imitates the desired aesthetic for low-plenum applications. The slim and shallow frame at a depth of 2 inch is simple and stylistic. The frosted polystyrene lens provides even and diffused ambient lighting that is glare-free. This luminaire is available in 4 ft and 8 ft.

### APPLICATIONS

Commercial, Educational, Healthcare Facilities, Medical, Offices, and Retail, etc.

### REPLACEMENT

Up to 4 lamp F32T8 or 4 lamp F28T5



### PERFORMANCE INFORMATION

SIZE	SERIES NUMBER	WATT	LUMENS	CCT
6" x 8'	SL 6 8 60 G1 35K	54W	5,508	3500K
6" x 8'	SL 6 8 80 G1 35K	80W	8,320	3500K

SIZE	SERIES NUMBER	WATT	LUMENS	CCT
6" x 4'	SL 6 4 40 G1 FSK	40W	3,800	3000K/ 3500K/ 4000K
		30W	2,880	
		20W	1,920	

### FEATURES



Driver Box



Slim Frame

ORDERING GUIDE								EXAMPLE: SL 6 4 80 G1 35K
Luminaire	Width	Size	Lumen Output*	Generation	Voltage	CCT	Finish	Options
SL	6			G1		35K		
<input type="checkbox"/> SL Slot Recessed Linear	<input type="checkbox"/> 6 6 inch	<input checked="" type="checkbox"/> 8 8 ft	<input checked="" type="checkbox"/> 60 5,508 Lumens <input checked="" type="checkbox"/> 80 8,320 Lumens	<input checked="" type="checkbox"/> G1	<input checked="" type="checkbox"/> BLANK= 120-277V	<input type="checkbox"/> 35K 3500K	<input type="checkbox"/> BLANK= White	<input type="checkbox"/> BLANK=No Option <input type="checkbox"/> EMH-9W=Emergency Driver 9W

SELECTABLE ORDERING GUIDE								EXAMPLE: SL 6 4 40 G1 FSK
Luminaire	Width	Size	Lumen Output*	Generation	Voltage	CCT	Finish	Options
			40	G1				
<input type="checkbox"/> SL Slot Recessed Linear	<input type="checkbox"/> 6 6 inch	<input checked="" type="checkbox"/> 4 4 ft	<input checked="" type="checkbox"/> 40 High - 3,800 Lm / 40 W Med - 2,880 Lm / 30 W Low - 1,920 Lm / 20 W	<input checked="" type="checkbox"/> G1	<input checked="" type="checkbox"/> BLANK= 120-277V	<input type="checkbox"/> FSK 3000K/ 3500K/ 4000K	<input type="checkbox"/> BLANK= White	<input type="checkbox"/> BLANK=No Option <input type="checkbox"/> EMH-9W=Emergency Driver 9W

Due to continuous product improvements, specification and/or equipment updates may change without notice.

## SPECIFICATIONS

### HOUSING

Body consists of extruded aluminum.

### AMBIENT TEMPERATURE

Suitable for use in 0°C to 40°C (32°F to 104°F)

### MOUNTING

Recessed mounting.

### EFFICACY

Up to 104 lumens per watt (see individual wattage data)

### CCT AND CRI

3500K CCT available; 80+CRI

**SL 6 4 40 G1 FSK** - 3000K/3500K/4000K selectable

### OPTICS

Frosted polystyrene lens.

### WARRANTY

5-year limited warranty. Comprehensive warranty terms can be located on [www.slgus.com](http://www.slgus.com).

### ELECTRICAL

High quality constant current drivers rated for 50/60Hz. Operation 120-277V input. Standard 0-10V dimming.

### ENERGY DATA

Power factor above 90%.


### FINISH

Standard Polyester Powder White finish. Multi-stage process for superior corrosion resistance and maximum durability.


### CERTIFICATIONS

UL Listed for damp and dry locations. FCC compliant. RoHs compliant.

## DIMENSIONS

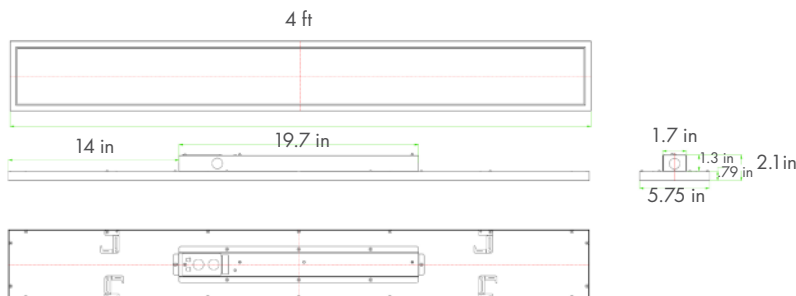


SL 6 4 ft

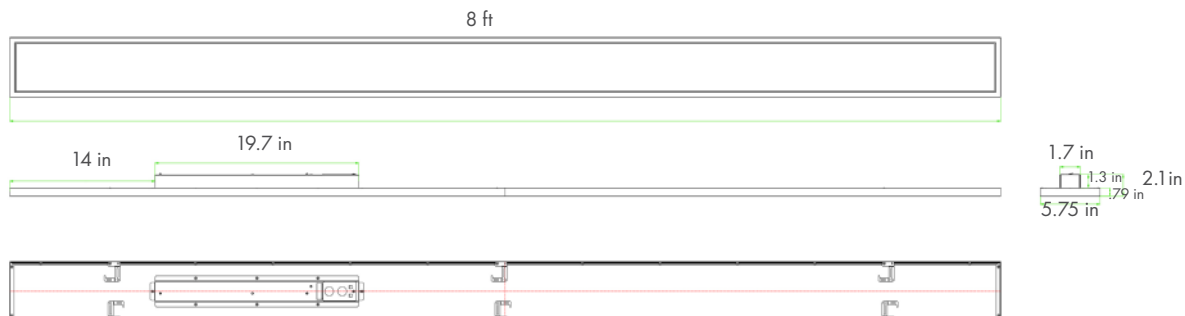

SL 6 8 ft

Due to continuous product improvements, specification and/or equipment updates may change without notice.

## PHOTOMETRIC DATA



### SL 6 4 40 G1 FSK

Lumens: 2,880 Lumens

Power: 30W

Efficacy: 96 lm/W

CANDLEPOWER DISTRIBUTION			
Vertical °	Horizontal °		
	0 °	45 °	90 °
45 °	675	657	639
65 °	369	341	483
75 °	203	169	309
85 °	62	35	7

ZONAL LUMEN SUMMARY		
Zone	Lumens	%Fixt
0-30	774	28.10
0-40	1467	46.00
0-60	2410	80.30
0-90	2880	100.00

## LUMEN AMBIENT TEMPERATURE (LAT) MULTIPLIERS

Ambient Temperature		Lumen Multiplier
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°F</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

## ELECTRICAL DATA

Watt	Current (A)			
	120V	208V	240V	277V
27W	0.23	0.13	0.11	0.10
40W	0.33	0.19	0.17	0.14
54W	0.45	0.26	0.23	0.19
80W	0.67	0.38	0.36	0.29

## PROJECTED LED LUMEN MAINTENANCE

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.00	0.97	0.97	0.96

Due to continuous product improvements, specification and/or equipment updates may change without notice.